Dane aktualne na dzień: 18-11-2026 21:33

Link do produktu: https://www.tradelectra.pl/akumulator-gp1272-f2-csb-12v-72ah-p-1231.html



# Akumulator GP1272 F2 CSB 12V 7.2Ah

| | |
|---|---|
| Cena brutto | **86,28 zł** |
| Cena netto | **70,15 zł** |
| Dostępność | **Dostępny** |
| Czas wysyłki | **24 godziny** |
| Numer katalogowy | **GP1272 F2** |
| Kod producenta | **GP1272 F2 TRADE** |
| Kod EAN | **5904653705532** |
| Producent | **CSB** |

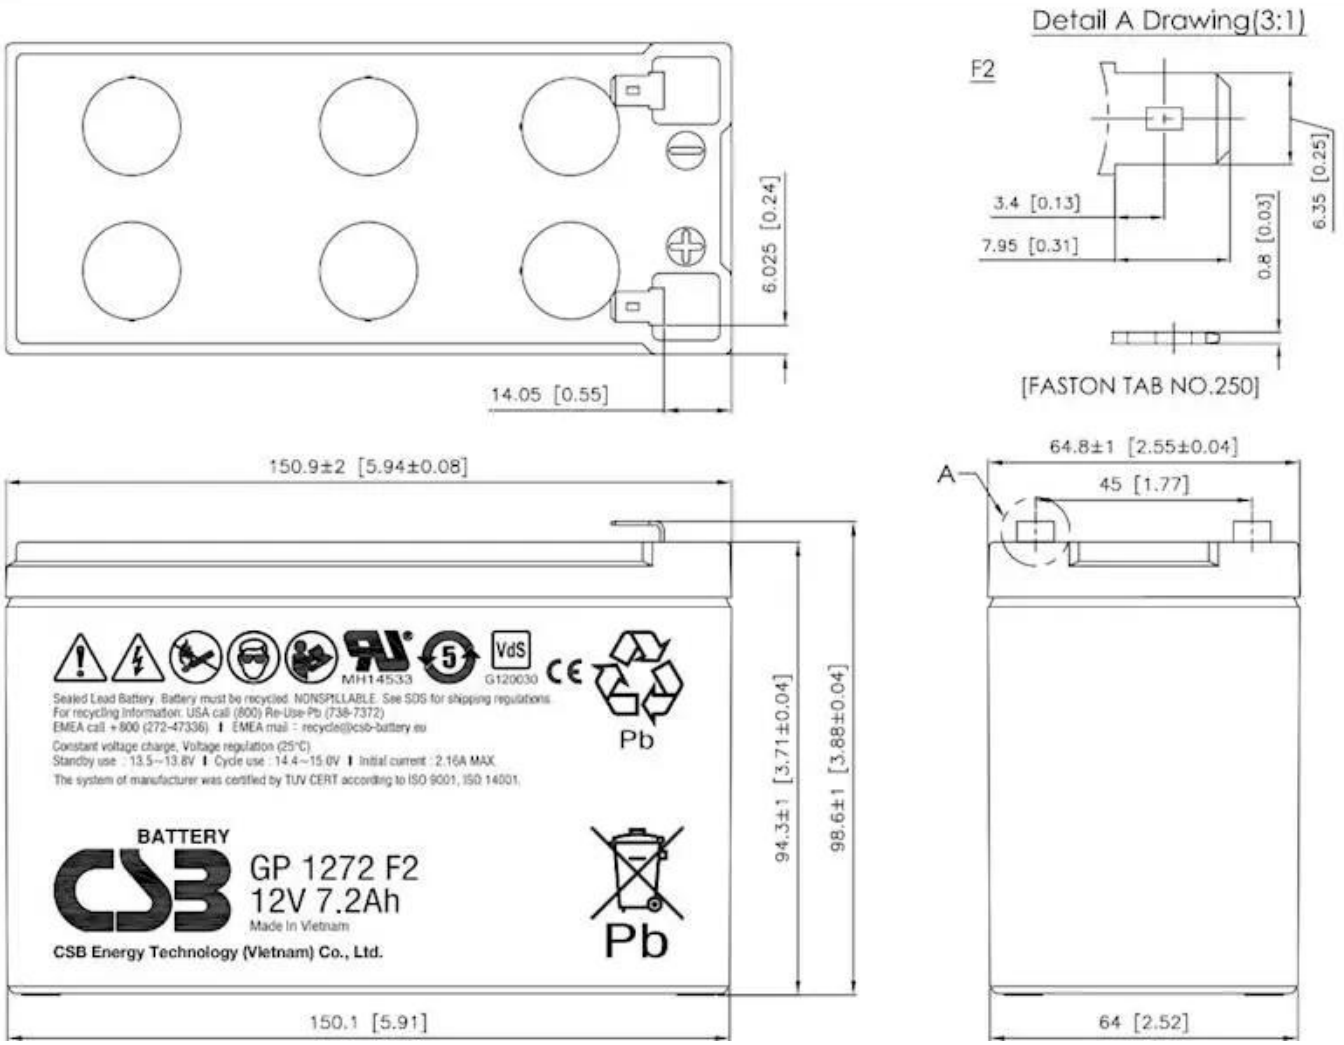
## Opis produktu

### GP1272 F2 Akumulator  CSB 12V 7.2Ah

GP1272 F2 to akumulator z serii GP (General Purpose- zastosowanie ogólne) . Akumulatory GP przeznaczone są do najszerszego zakresu zastosowań, w tym do zastosowań w systemach bezpieczeństwa, oświetleniu awaryjnym, medycynie i wielu innych. Podobnie jak inne akumulatory CSB, akumulatory te są bezobsługowe, szczelne i pracują w dowolnej pozycji.Technologia VRLA-AGM. Projektowana żywotność 3-5 lat według Eurobat.

- Napięcie: 12V
- Pojemność 20h: 7,2Ah
- Długość: 151 mm
- Szerokość: 65 mm
- Wysokość z terminalem: 99 mm
- Typ złącza: Faston  6,3 mm (F2)
- Certyfikat VdS
- Technologia AGM
- VARLA-bezobsługowe, szczelne i pracują w dowolnej pozycji
- IEC 61056-1/2:2012 and UL1989 Recognized (MH14533)
- Producent CSB Energy Technology


Sealed Lead Battery. Battery must be recycled. NONSPILLABLE. See SDS for shipping regulations
For recycling information: USA call (800) Re-Use-Pb (738-7372)
EMEA call +800 (272-47336) I. EMEA mail recycle@csb-battery.eu
Constant voltage charge. Voltage regulation (25°C)
Standby use : 13.5–13.8V ▮ Cycle use : 14.4–15.0V ▮ Initial current : 2.16A MAX
The system of manufacturer was certified by TUV CERT according to ISO 9001 ISO 14001
MH14533
G120030
VdS
Pb
BATTERY
GP 1272 F2
12V 7.2Ah
Made in Vietnam
CSB Energy Technology (Vietnam) Co., Ltd.
Pb


Detail A Drawing(3:1)
F2
3.4 [0.13]
7.95 [0.31]
0.8 [0.03]
6.35 [0.25]
[FASTON TAB NO.250]
6.025 [0.24]
14.05 [0.55]
150.9±2 [5.94±0.08]
64.8±1 [2.55±0.04]
45 [1.77]
A
MH14533
G120030
Sealed Lead Battery. Battery must be recycled. NONSPILLABLE. See SDS for shipping regulations.
For recycling information: USA call (800) Re-Use-Pb (738-7372)
EMEA call +800 (272-47336) ❙ EMEA mail : recycle@csb-battery.eu
Constant voltage charge, Voltage regulation (25°C)
Standby use : 13.5~13.8V ❙ Cycle use : 14.4~15.0V ❙ Initial current : 2.16A MAX.
The system of manufacturer was certified by TUV CERT according to ISO 9001, ISO 14001.
Pb
BATTERY
GP 1272 F2
12V 7.2Ah
Made in Vietnam
CSB Energy Technology (Vietnam) Co., Ltd.
Pb
94.3±1 [3.71±0.04]
98.6±1 [3.88±0.04]
150.1 [5.91]
64 [2.52]